


TEST STATION, BIG FINK, T-3, OR EQUAL  
WITH 0.01 OHM SHUNT,  
SPECIFY TEST STATION COLOR

3" x 5' PE POST

CONCRETE FOOTING

FINAL/ EXISTING GRADE

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
0	ISSUED FOR REVIEW		

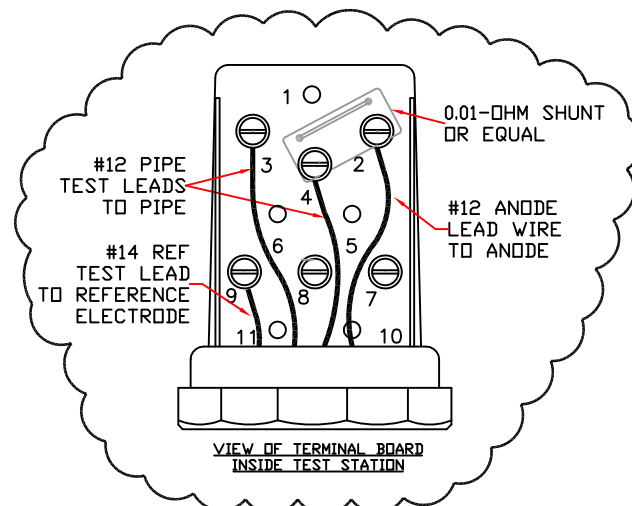

1/2" PVC ANCHOR PIPE

TEST LEAD WIRES.  
#12 AWG STRANDED WIRE (MIN.)  
WITH SPECIFIED INSULATION.  
IDENTIFY LOCATIONS WITH I.D.  
LABELS OR WIRE COLOR.

#14 AWG STRANDED WIRE,  
RHH/RHW INSULATION,  
YELLOW OR AS SPECIFIED

#12 AWG TSOLID WIRE, THHN  
INSULATION OR AS SPECIFIED

THERMITE WELD OR PIN BRAZE  
CONNECTION REPAIR COATING  
AS SPECIFIED

INSTALLED AT A DEPTH OF OR  
BELOW PIPELINE SPRINGLINE

PIPELINE SPRINGLINE

PREPACKAGED PERMANENT  
COPPER SULFATE REFERENCE  
ELECTRODE OR AS SPECIFIED

1'

5' MIN.

COATED PIPELINE

PREPACKAGED MAGNESIUM ANODE  
(SIZE AS SPECIFIED)

DRAWN BY  
T.S.H. 12/08

ENGINEER

JOB NO.



FARWEST CORROSION CONTROL COMPANY  
1480 W. Artesia Blvd. Gardena, California

TYPICAL CATHODIC PROTECTION  
SINGLE MAG. ANODE TEST STATION  
WITH COPPER SULFATE REFERENCE

SIZE

A

DWG NO.

S-4B-CCS

FILE

S-4B-CCS

SCALE

NONE

REV

0

SHEET

1 of 1